


CX810

Smart 4K HDR ColorX PoE Camera

- 4K Ultra HD och HDR-teknik
- Äkta mörkerseende i färg i det svagaste ljuset
- F1.0 superbländare

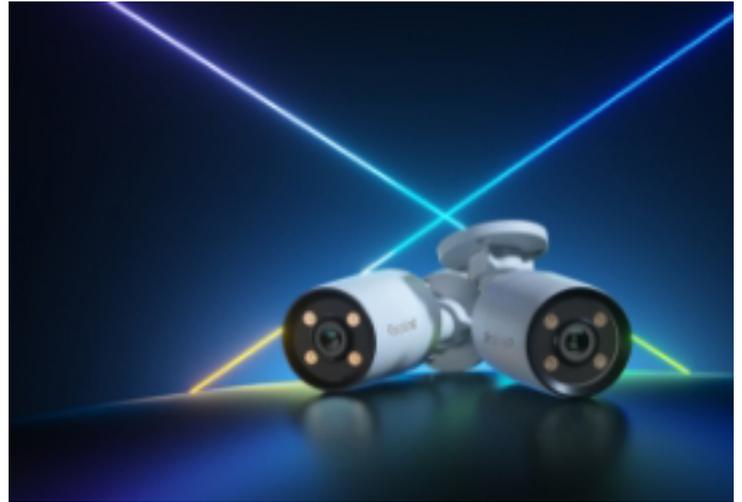

Specifications

Video och ljud	
Bildsensor	1/1.8" CMOS sensor
Resolution	3840x2160 (8 megapixels)@25fps
Lins	f=4.0mm, F=1.0 IR CUT
Video Compression	H.265/H.264
Zoom	N/A
Synfält	Horizontal: 93.2° Vertical: 48.2° Diagonal: 111.6°
Infrared Night Vision	N/A
Color Night Vision	With spotlights: 4pcs/3w/3000K/ 400Lumens (Max illumination distance:15m)
Frame Rate	Main stream: 2fps - 25fps (default: 25fps) Sub stream: 4fps - 15fps (default: 10fps)

Code Rate	Main stream: 1024Kbps - 8192Kbps (default: 6144Kbps) Sub stream: 64Kbps - 512Kbps (default: 256Kbps)
Ljud	Two-way audio
Power Requirements	
PoE	IEEE 802.3af, 48V, active
DC Power	DC 12V ²³ 1A, <12W
Gränssnitt	
Power Port	DC power port
SD Card Slot	Supports Max. 256GB microSD card
Reset Button	DC 12V ²³ 1A, <12W
Audio In/Out	IEEE 802.3af, 48V, aktiv
External Interfaces	
Ethernet Ports	One 10M/100Mbps; RJ45
Software	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	JA
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
User Access	Max. 20 users (1 admin & 19 user); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion detection; person detection; vehicle detection; animal detection
Recording Modes	Motion-triggered recording (default); scheduled recording, 24/7 recording
Time Lapse	YES
Smart Home Compatibility	Google Assistant
Arbetsmiljö	

Operating Temperature	-10°C~+50°C (14°F~126°F)
Operating Humidity	10% ~ 90%
Väderbeständig	IP67
Mechanical	
Dimensions	67*187mm
Weight	467g
Garanti	
Begränsad garanti	Ej tillämpligt


Gallery & Specs



1. Bracket
2. Speaker
3. Aluminum Housing
4. Spotlight
5. Lens



1. microSD Card Slot

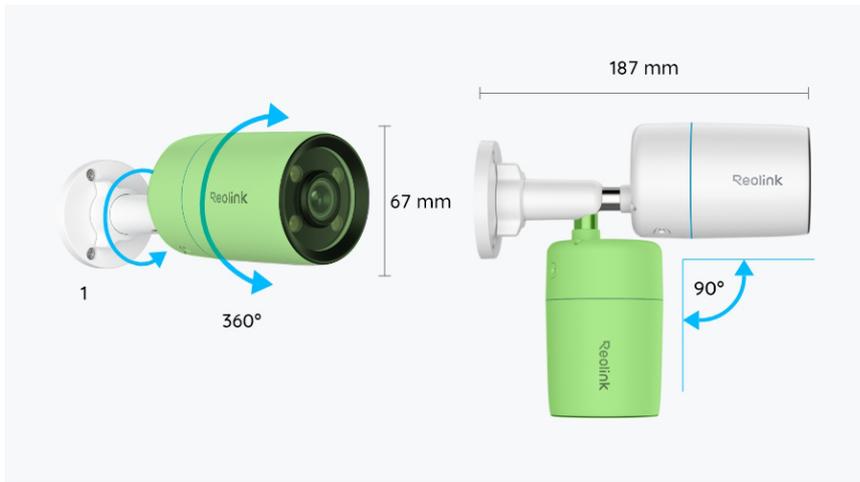

1. Turn the adjustment knob counterclockwise to loosen the bracket and adjust the camera in any direction.
 2. After adjusting, turn the adjustment knob back (clockwise) to secure the camera in place.



1. Power
2. Reset Button
3. Network